


# SPECIFICATION DATASHEET

<b>Filtration Capacity</b>	1500 - 3000 l/day
<b>Fluid Compatibility</b>	All straight cutting oils (no emulsions)
<b>Contaminants</b>	Carbide, Cermet, PCD, High Speed Steel, Precious metals, Cast iron, Iron alloys, Copper alloys, Aluminum, Ceramic, Plastics
<b>Filtration Rating</b>	≤ 3 µm nominal
<b>Dimensions</b>	3.8 x 2.0 x h 2.35 m (h. 3.2 m with automatic vacuum system)
<b>Fluid Volume</b>	6000 l. (2400 clean oil - 2400 dirty oil - 1200 recycle)
<b>Filter Media</b>	Cellulose Powder, Mineral Powder
<b>Filtering Area</b>	15 m <sup>2</sup>
<b>Filter Media Consumption</b>	10 kg per Work-Cycle

## Mod. 2F25TA-EU16

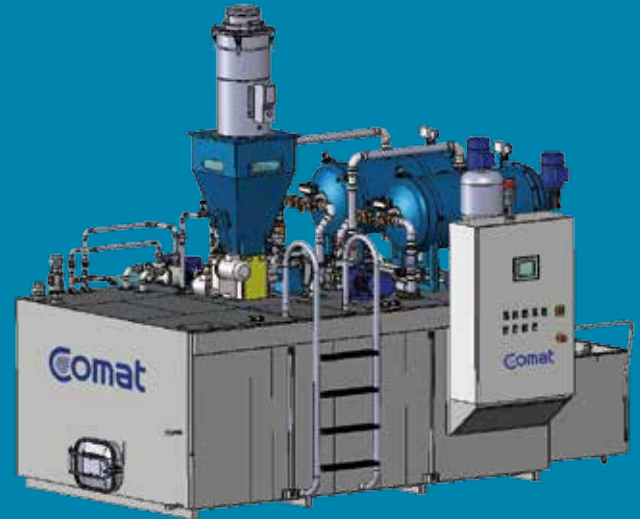

## MANAGEMENT SYSTEMS

<b>Workcycle management</b>	Basic, Smart
<b>Sludge removal</b>	Manual
<b>Filter media loading</b>	Manual (vacuum loading kit available as optional)
<b>Magnetic pre-separator</b>	Not included (unit available as optional)
<b>Temperature control</b>	Not included (unit available as optional)

## REQUIRED UTILITIES

<b>Voltage</b>	400 Volt 3Ph+N+PE 50 Hz (To be specified by customer)
<b>Installed power</b>	7 kW (core unit only)
<b>Compressed air</b>	6 Bar (dry air)

## DEFAULT INTERFACE

<b>Dirty Fluid Inlets</b>	2" G female connector
<b>Clean Fluid Outlets</b>	1-1/4" G female connector (single-outlet)
<b>Internet</b>	RJ-45 Ethernet Plug (Internet service to be provided by customer)
<b>Compressed air</b>	1/4" G female connector

## COOLANT MANAGEMENT

Fluid collection from machines	Optional collection units available
Fluid distribution to machines	To be determined by project


## CERTIFICATIONS

CE certification	Yes
UL certification	Available as optional

Filtration performance may vary depending upon operating conditions.  
 Standard operating conditions include: fluid at ambient temperature 20-25°C, kinematic viscosity of 10 cSt at 40°C, max materials contamination of 30 mg/l. Fluid free of other contaminants such as polymers, paraffins, water. Fluid with limited aging degradation (Total Acid Number < 1 mg KOH/g).  
 Fluid Compatibility: the liquid must be in Group 2 and have a vapour pressure at the maximum allowable temperature of not more than 0.5 bar, according to Directive 2014/68/EU.  
 Max working temperature: 60°C.

## CORE UNITS

CORE UNITS	BASIC	SMART
Automatic workcycle	✓	✓
Automatic new oil refilling	optional	✓
Automatic dirty oil inlet control	optional	✓
Filter media vacuum loading kit	optional	✓
Black-out restart kit	optional	✓

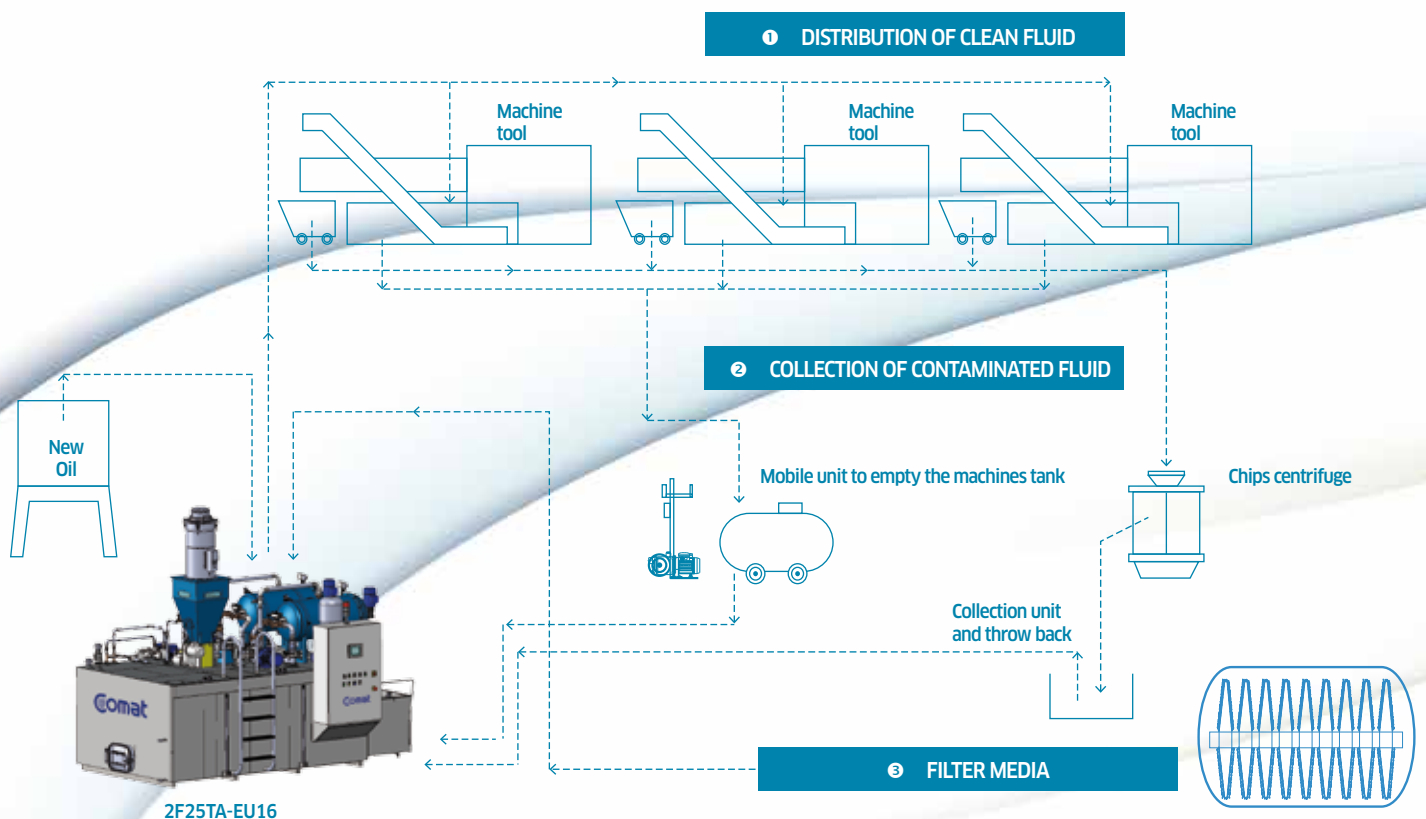

2F25TA-EU16

**Comat S.r.l**

Via Giacomo Puccini 7, Ossonà, MI 20010 - Italy  
 Phone: +39 0290384121 - Fax: +39 0290384017  
[www.comatfilters.com](http://www.comatfilters.com) - [info@comatfilters.com](mailto:info@comatfilters.com)